



TRELLEBORG

Trelleborg

Exc900



EXC900

Performance you can trust on any terrain

In today's demanding worksites, you need a tire that keeps up with every challenge. Engineered for wheeled excavators, our EXC900 delivers exceptional durability, stability and traction, whether you're working on soft soil, rugged terrain, or smooth highways. Designed for versatility, it supports heavy work attachments while ensuring a comfortable, controlled ride even at high speeds. With optimized tread design and reinforced construction, the EXC900 is built to maximize performance, minimize downtime, and keep your projects moving forward.



**REINFORCED
CARCASS**



**HIGH LOAD
CAPACITIES**



**REINFORCED
SIDEWALL**



**HIGH
STABILITY**



**LOW FUEL
CONSUMPTION**




1 Tread design

The innovative tread design minimizes surface pressure while maximizing grip, ensuring excellent traction and durability. Reinforced center blocks enhance road performance, delivering a smooth and more comfortable ride. In addition, the optimized tread pattern reduces rolling resistance, improving fuel efficiency and extending battery life in electric mobile cranes.



2 Tire structure

Designed for high load capacities, our tire supports the use of heavy attachments without compromising stability. The tire specialized construction helps absorb shocks and reduce machine movement, offering better control and efficiency even in demanding conditions.

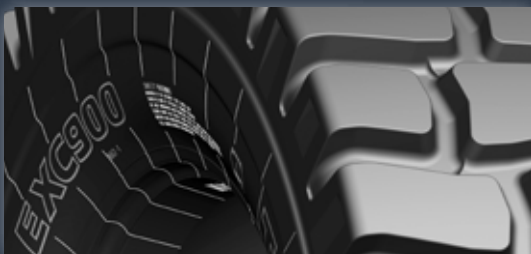

3 Reinforced sidewall


Sidewall structure is designed to minimize risks of tire cuts and damages due to stones or sharp material, also thanks to sidewall ring protector.



4 Wide contact area

The wide footprint area results in even wear, excellent stability and reduced vibration improving operator comfort.

+10%
vs Premium
Competitor

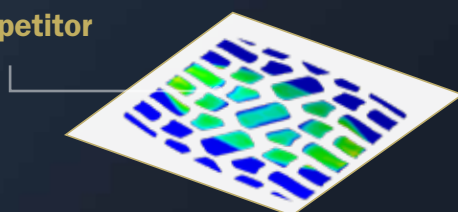

EXC900

Tire size	Service description LI/SS Loader/Transport	Tread pattern	Rim size (Permitted)	Overall Diameter mm	Section Width mm	Tread depth mm	Tire load capacity (kg) at 40 (km/h)	Tire pressure (bar)
600/50-22.5	* 173A8	EXC900	AG 20.00X22.5	1.158	615	27	6.500	6.0
650/45-22.5	* 175A8	EXC900	AG 22.00X22.5	1.137	636	27	6.900	6.0
710/40-22.5	* 173A8	EXC900	AG 24.00X22.5	1.152	703	27	6.500	5.5

The information and technical data provided in this catalogue are indicative and may be subject to change without prior notice. For up-to-date data and official product specifications, please refer to the product technical sheet available through your sales representative.



Shop our tires online



**Discover our website
and your legal guarantee rights**

Follow us

