



TRELLEBORG

Trelleborg

EMR1030



EMR1030

Superior performance for the toughest jobs

Designed for articulated dumpers, loaders, and graders, the EMR1030 range is built for all types of hauling and loading operations. Its versatility makes it ideal for industries such as infrastructure, building construction, landscaping, open-pit mining, and quarrying. The multi-surface tread pattern ensures excellent control and reliable grip across varied terrains, including sand, rock, gravel, and soil.



**ALL-STEEL RADIAL
CONSTRUCTION**



**REINFORCED
CARCASS**



**MULTI
SURFACE**



**EXCELLENT
RIDE COMFORT**



Tread design

Multi-surface design to grant traction and comfort, with no vibration during all loader and ADT operations, and a self-cleaning zig-zag pattern.



Shoulder design

Provides additional traction and self-cleaning to cope with the muddiest conditions.



Cut-resistant compound

This high performing compound is up to 20% more resistant to cuts and wear compared to standard compounds.

The tire lasts longer, reducing machine downtime, lowering cost per hour.



Sidewall protector

Reinforced sidewalls prevent tire damage when working over rough ground, such as rocky areas.




29.5R25 EMR1030+ PRO-PIT

Higher durability, higher performance

The new 29.5R25 EMR1030+ PRO-PIT represents an enhanced evolution of the range, featuring an improved compound, reinforced casing, and an additional 4 mm of tread depth. Together, these upgrades deliver extended tire life and exceptional performance in the harshest operating conditions.


1 Higher tread depth

+4 mm compared to the standard version, designed to extend tire life and reduce cost per hour.

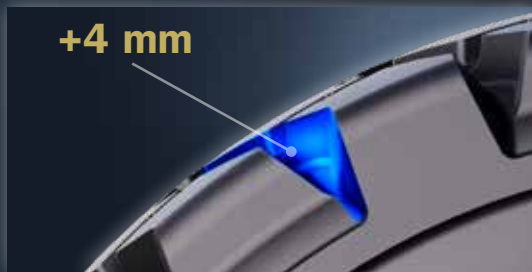

2 Reinforced casing

A stronger casing engineered to withstand extreme stress and demanding operations, ensuring durability even in the toughest conditions.

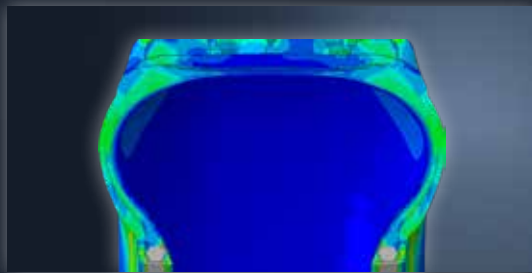

3 Optimized sidewall structure

Newly designed sidewalls to resist stress and enhance handling performance during operation.



4 Wider, stronger beads

+40% wider beads to prevent rim/tire slippage and to provide superior resistance under heavy loads and stress.



EMR1030

LOADER/TRANSPORT SERVICE

Tire size	Tread pattern	TRA Code	Rim size (Permitted)	Tread depth (mm)	Service description LI/SS Loader/Transport	Tire load capacity (kg) at 10 (km/h)	Tire pressure (bar)	Tire load capacity (kg) at 50 (km/h)	Tire pressure (bar)
17.5 R 25	EMR1030	L3/E3	14.00/1.5-25 (14.00/1.5x25 DC, 14.00/1.3x25 DC)	27	* 176 A2/157 B	7.100	4.50	4.125	3.50
20.5 R 25	EMR1030	L3/E3	17.00/2.0-25 (17.00/1.7-25)	34	** 193 A2/177 B	11.500	5.75	7.300	4.50
23.5 R 25	EMR1030	L3/E3	19.50/2.5-25	36	** 201 A2/185 B	14.500	5.75	9.250	4.50
26.5 R 25	EMR1030	L3/E3	22.00/3.0-25	42	** 209 A2/193 B	18.500	5.75	11.500	4.50
750/65 R 25	EMR1030	L3/E3	24.00/3.0-25	41	** 209 A2/190 B	18.500	6.25	10.600	4.25
29.5 R 25	EMR1030+ PRO-PIT	L3/E3	25.00/3.5-25	48	** 216 A2/200 B	22.400	5.75	14.000	4.50

*/** Index of tire strength

GRADER SERVICE

Tire size	Tread pattern	TRA Code	Rim size (Permitted)	Tread depth (mm)	Service Description LI/SS Grader	Tire Load Capacity (kg) at 40 (Km/h)	Tire pressure (bar)
17.5 R 25	EMR1030	G3+	14.00/1.5-25 (14.00/1.5x25 DC, 14.00/1.3x25 DC)	27	* 153 A8	3.650	3.00
20.5 R 25	EMR1030	G3+	17.00/2.0-25 (17.00/1.7-25)	34	* 161 A8	4.625	3.00
23.5 R 25	EMR1030	G3+	19.50/2.5-25	36	* 170 A8	6.000	3.00
26.5 R 25	EMR1030	G3+	22.00/3.0-25	42	* 178 A8	7.500	3.00
750/65 R 25	EMR1030	G3+	24.00/3.0-25	41	* 178 A8	7.500	3.00

*/** Index of tire strength



Shop our tires online



Discover our website

Follow us

