



Engineered Performance

PREMIUM

MID-RANGE

ECONOMY

PREMIUM CONSTRUCTION SOLID EXCAVATOR

Trelleborg Excavator product lines deliver superb performance in the harshest environments.

Available as a dual assembly or super single for use on material handlers. Our excavator tires are manufactured with special compounds that are extremely resistant to cuts and tears. Principally designed for use in metal recycling or any environment where the risk of tire damage is high.

BENEFITS

- High quality wheel withstands heavy duty use
- Wide profile improves stability and traction
- Cut resistant compound for longer tire life



Excavator

* Only available as dual assembly



Traction




Smooth

EXCAVATOR

Tire Size	Rim Size	Overall Diameter (In)	Section Width (In)
10.00-20	7.5	39.8	22.0
12.00-20	8.5	43.2	24.8

* Spacer only replacements available

COMPLETE ASSEMBLIES

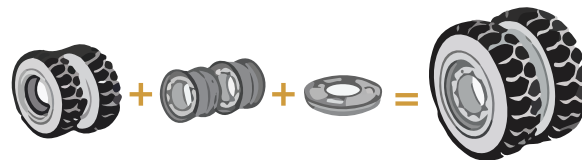

SUPER SINGLE (available in traction and smooth)

Tire Size	Pneumatic Equivalent Size	Usable Rubber (In)	Weight (lbs)	Load Capacity 6 mph (lbs)
42x10x22	10.00-20	3.5	1,132	23,600
45x10x24	12.00-20	3.5	1,468	37,810
48x10x27	12.00-24	4.0	2,262	44,370
52x10x31	14.00-24	4.0	2,880	55,680